

CONCENTRIC AND NEGATIVE RAKE


| Product Code Guide | Bit Type | Drill Diameter | Shank Size | Flush Style |
|--------------------|----------|----------------|------------|-------------|
| | CN | 32 | 16 | CF |

Physical Properties

| Thread Shank Size | Drill Bit Diameter |
|-------------------|--------------------|
| mm | mm |
| 16 | 36 |
| 16 | 38 |
| 16 | 40 |

Key Features

- Concentric tip and negative Rake.
- A robust two wing drill bit for wet drilling designed for drilling larger diameter holes in medium to hard conditions.
- The grade of tungsten carbide insert provides extremely good wear resistance and is time proven for all types of conditions.
- These drill bits have a central water flushing hole. The drill bit body is specifically designed for clearance of rock cuttings.
- The drill bit body is made of high tensile material for strength and abrasion resistance.

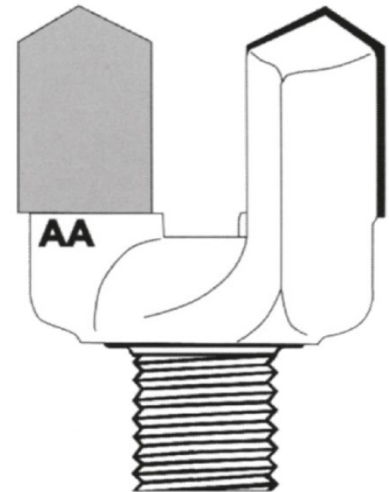

Packaging

- Supplied in plastic pails containing 25 drill bits.

Notes

- Only DSI Underground rock bolt components should be used to enable the optimum performance of the bolt system to be obtained.
- DSI Underground Mining Products Division is Quality Assured to ISO 9001:2015

Phone APP

- Want to know more; our full product range, knowledge centre, and other details are available via the App; available on iOS and Android devices by searching “DSI Underground”.



iOS



Android