


Product Code Guide	Bit Type	Drill Diameter	Shank Size	Flush Style
	EP	27	16	XF

Physical Properties

Thread Shank Size	Drill Bit Diameter	Tungsten Carbide Grade
mm	mm	
16	27	Standard
16	28	Standard

Key Features

- Eccentric tip and positive rake.
- Fast penetrating two wing drill bit for wet drilling which is suitable for softer type conditions.
- The positive front rake and eccentric tips, assists in penetration with low thrust machines.
- The standard grade of tungsten carbide insert provides extremely good wear resistance and is time proven for all types of conditions. Unless otherwise specified the standard grade of carbide is assumed.
- For abrasive conditions, such as found with some sand stones, the tungsten carbide inserts can be supplied in a heat resistant grade. However, these inserts may chip under high impact loading. This heat resistant grade is nominated with "H" added to the end of the product code.
- These drill bits have a central water hole plus two side water grooves for extra flushing. The drill bit body is specifically designed for clearance of rock cuttings. The body is made of high tensile material for strength and abrasion resistance.
- Reference should be made to DSI Underground's "Practical Guide to Rock Bolting" highlighting installation problems associated with collaring the hole, angle bolting, hole diameter and depth.

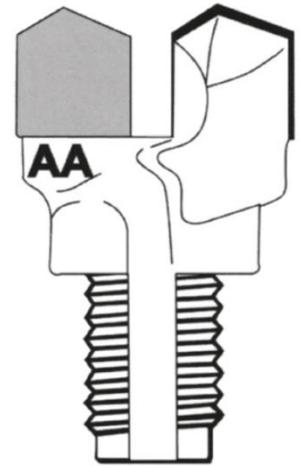


Packaging

- Supplied in plastic pails containing 50 drill bits.

Notes

- Only DSI Underground rock bolt components should be used to enable the optimum performance of the bolt system to be obtained.
- DSI Underground Mining Products Division is Quality Assured to ISO 9001:2015

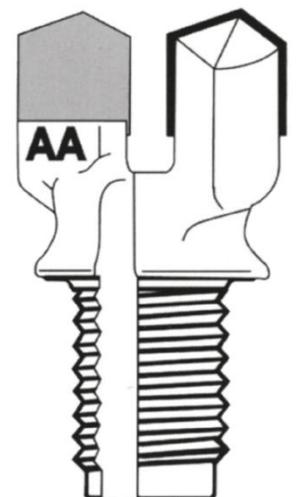

Phone APP

- Want to know more; our full product range, knowledge centre, and other details are available via the App; available on iOS and Android devices by searching “DSI Underground”.



iOS



Android