


Product Code		
	SAFRING	47

Length	Diameter	Weight
mm	mm	kg
17	74.6	0.1

Key Features

- The SAFRING can be applied to a friction bolt during install.
- The SAFRING Friction Bolt Collar provides angular misalignment up to 17° to eliminate the difficulties of point loading on Friction Bolt Rings.
- The SAFRING provides a collar for load testing of the friction bolt via pull test equipment.
- The hemispherical collars load sharing ability should overcome the incidents of split ring failure and plate punch through.
- Corrosion protection may be provided by hot dip galvanising.
- SAFRINGS are made from Hollow Bar grade: DIN 20mm V6 or round bar grade: AS1442/1045 with UTS 57-700mPa and yield 300 – 450mPa.
- Caution: DSI Underground do not recommend the use of cast collars when used in conjunction with pull test equipment.

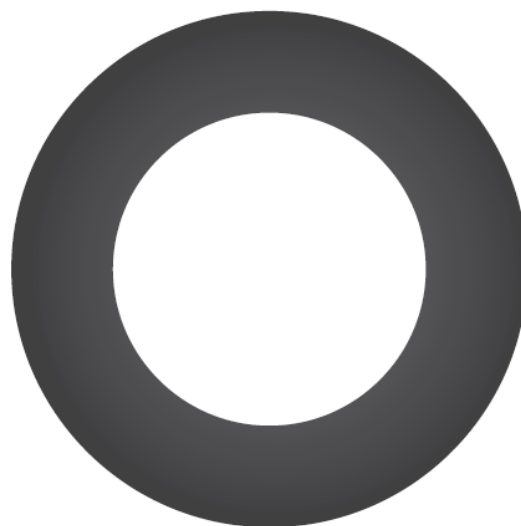

Notes

- DSI Underground is Quality Assured to ISO 9001:2015.

Phone APP

- Want to know more; our full product range, knowledge centre, and other details are available via the App; available on iOS and Android devices by searching “DSI Underground”.



iOS



Android